



Logomatic PSCK-Applicator

Worldwide GS1 norm for reuseable products

/ Application on tying cord

/ Suitable for harsh environments

Industrial Print & Apply /// logopak.com



Logomatic PSCK-Applicator

Pallet-cord applicator for full automatic labelling of reusable container at pallet-tyer. With integrated cutter for Linerless label material.

Label format

- / Min.: 100 x 150 mm (WxH)
- / Max.: 150 x 210 mm (WxH)
- / Other formats upon request!

Applicator

- / Labelling of stopped products
- / Realtime labelling: no printed labels in between
- / Up to 120 pallets/h (1 label)
- / Up to 90 pallets/h (2 labels)
- / Up to 70 pallets/h (3 labels)
- / Suitable for tertiary- and pallet labelling

Net stroke (PSCK)

- / Standard: 350 mm
- / Min.: 100 mm
- / Max.: 550 mm


Standard functions

- / Support frame
- / Manual height adjustment
- / Integrated cutter
- / Integrated position sensors
- / Adjustable stroke limiter
- / Flow control valve for fine adjustment
- / External signal telescope-home position
- / Compressed air monitoring
- / Vacuum monitoring


Options

- / Stainless steel and special colours
- / Adjustable cooling- or heating systems
- / Safety-cord guide passive/active
- / Vericoder for verification according ISO-norm
- / Scanner for barcode validation
- / Product sensor

Cycle rate with standard stroke

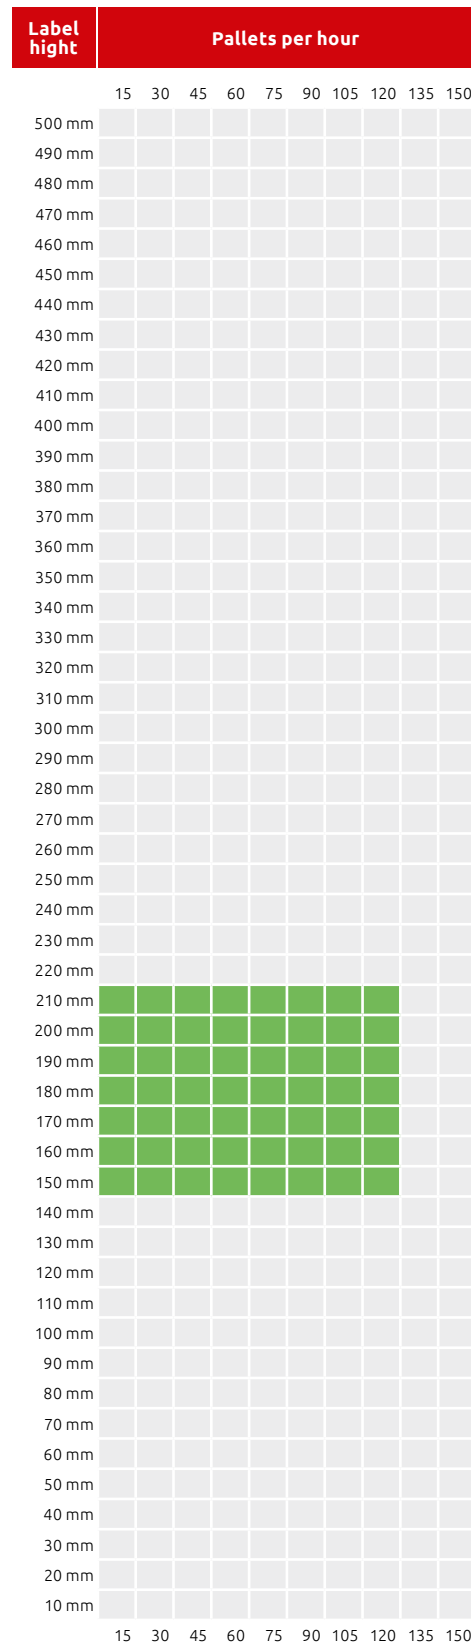

Orientation

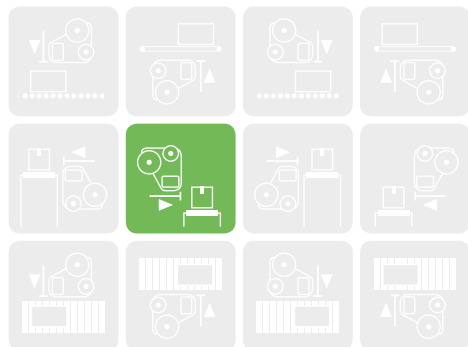


- Operating side right
- Operating side left
- not available

Machine compatibility

Series 100	Series 300	Series 400	Series 500	Series 800	Series 900
-	-	-	-	-	✓
R/L	R/L	R	R/L	R/L	R

Application

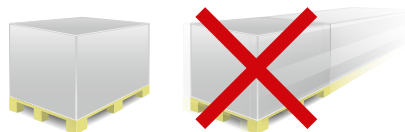

- Standard
- Advance
- High speed

Subject to technical changes..