

Logomatic P-Applicator

All-rounder for pallet labelling

- / Extreme robust design
- / Integrated blow-on function

Industrial Print & Apply /// logopak.com



Logomatic P-Applicator

Telescope applicator for pallet labelling.

Label format

- / Min.: 74 x 74 mm (W x H)
- / Max.: 300 x 420 mm (W x H)
- / Other formats upon request!

Applicator

- / Labelling of stopped products
- / Realtime labelling: no printed labels in between
- / Up to 240 pallets/h
- / Suitable for tertiary- and pallet labelling

Net stroke (P) Series 800

- / Standard: 500 mm
- / Min.: 300 mm
- / Max.: 500 mm

Net stroke (P) Series 900

- / Standard: 800 mm
- / Min.: 300 mm
- / Max.: 1.000 mm


Standard functions

- / Integrated position sensors
- / Adjustable stroke limiter
- / Flow control valve for fine adjustment
- / External signal telescope-home position
- / Compressed air monitoring
- / Vacuum monitoring


Options

- / Flexo-pad
- / 1x additional pressing stroke integrated in vacuum pad
- / 4x additional pressing stroke integrated in vacuum pad
- / Brake-cylinder for positioning
- / Vericoder for verification according ISO-norm
- / Scanner for barcode validation
- / Product sensor

Cycle rate with standard stroke

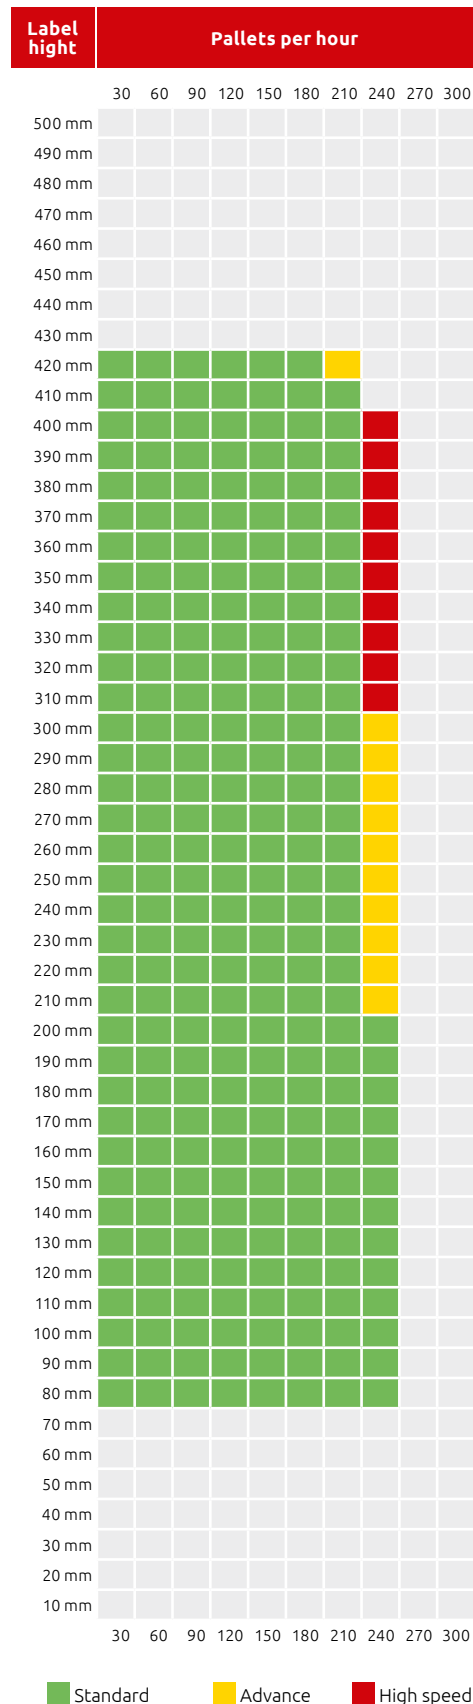

Orientation

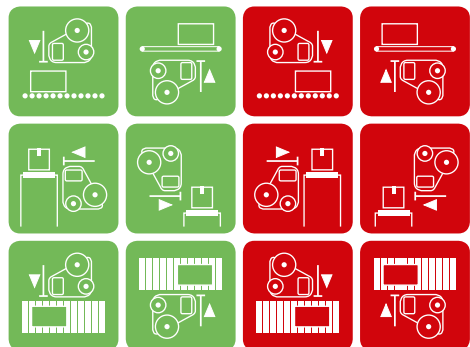


■ Operating side right ■ Operating side left
■ not available

Machine compatibility

Series 100	Series 300	Series 400	Series 500	Series 800	Series 900
-	-	-	-	✓	✓
R/L	R/L	R	R/L	R/L	R

Application

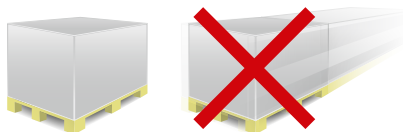

Subject to technical changes..