



Technical specifications

LOGOMATIC Applicator | TK

All-rounder for keg-labelling

- » Suitable for curved surfaces
- » Suitable for harsh environments

LOGOMATIC Applicator | TK

Telescope with vacuum-pad for variable product heights. Flexible designed applicator unit for keg labelling.

Label format

- » Min.: 35 × 30 mm (W × H)
- » Max.: 80 × 80 mm (W × H)
- » Other formats upon request!

Applicator

- » Labelling of stopped products
- » Realtime labelling: no printed labels in between
- » Up to 15 labels / min
- » Suitable for primary- and secondary labelling

Net stroke (TK)

- » Standard: 400 mm
- » Min.: 300 mm
- » Max.: 500 mm

Standard functions

- » External signal telescope-home position
- » Integrated position sensors
- » Adjustable stroke limiter
- » Flow control valve for fine adjustment
- » Flexo-pad
- » Compressed air monitoring
- » Vacuum monitoring


Options

- » Vericoder for verification according ISO-norm
- » Scanner for barcode validation
- » Product sensor

Cycle rate with standard stroke



Orientation

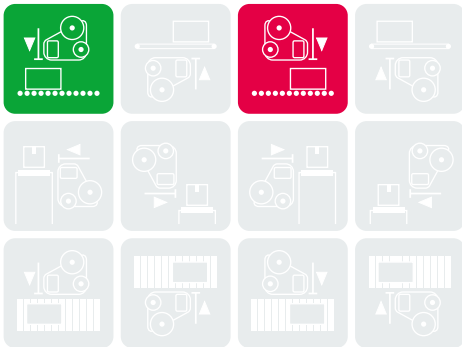


■ Operating side right
 ■ Operating side left
 ■ not available

Machine compatibility

Series 100	Series 300	Series 400	Series 500	Series 800	Series 900
✓	-	✓	✓	-	✓
R/L	R/L	R/L	R/L	R/L	R

Application

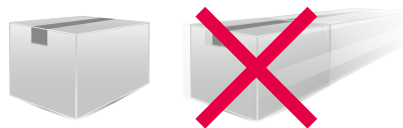

■ Standard
 ■ Advance
 ■ High speed