



Technical specifications

## LOGOMATIC Applicator | TBH

### Mail-order labelling

- » Suitable for harsh environments
- » Suitable for varying product dimensions

# LOGOMATIC Applicator | TBH

Telescope applicator for high-speed labelling of products with variable product heights. Blow-on function, servo drive with servo controller and integrated height measure system.

### Label format

- » Min.: 50 × 50 mm (W × H)
- » Max.: 210 × 155 mm (W × H)
- » Other formats upon request!

### Applicator

- » Labelling with stopped or moving products possible
- » Realtime labelling: no printed labels in between
- » Up to 50 labels / min
- » Suitable for primary- and secondary labelling

### Net stroke (TBH)

- » Standard: 350 mm
- » Min.: 100 mm
- » Max.: 700 mm

### Standard functions

- » Integrated position sensors
- » Compressed air monitoring
- » Vacuum monitoring


### Options

- » External signal telescope-home position
- » Height measure system
- » Vericoder for verification according ISO-norm
- » Scanner for barcode validation
- » Product sensor

### Cycle rate with standard stroke



### Orientation

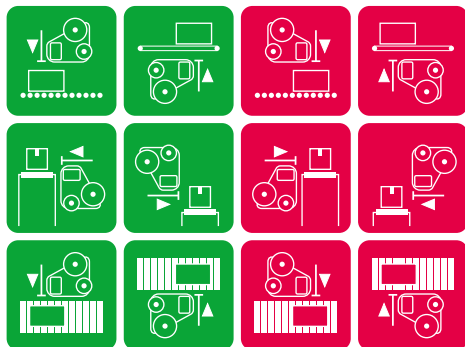

■ Operating side right 
 ■ Operating side left  
■ not available

### Machine compatibility

Series 100	Series 300	Series 400	Series 500	Series 800	Series 900
-	-	✓	✓	-	✓
R/L	R/L	R/L	R/L	R/L	R

### Application



■ Standard 
 ■ Advance 
 ■ High speed