



Technical specifications

LOGOMATIC Applicator | ETVM90

With two apply positions

- » Suitable for round surfaces or bags
- » Fit various products dimensions

LOGOMATIC Applicator | ETVM90

Telescope applicator with 2-axes and pneumatic pivot mechanism to apply labels onto uneven or round surfaces in moving product condition. The swing direction is rotated 90° of the print direction.

Label format

- » Min.: 65 × 30 mm (W × H)
- » Max.: 210 × 210 mm (W × H)
- » Other formats upon request!

Applicator

- » Labelling of moving products
- » Realtime labelling: no printed labels in between
- » Up to 10 labels / min
- » Suitable for primary- and secondary labelling

Net stroke (E)

- » Standard: 250 mm
- » Min.: 25 mm
- » Max.: 500 mm


Net stroke (T)

- » Standard: 350 mm
- » Min.: 50 mm
- » Max.: 500 mm

Net stroke (V90)

- » Standard: 30 mm
- » Min.: 10 mm
- » Max.: 45 mm

Orientation

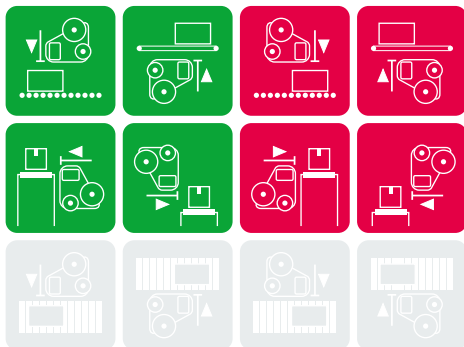

■ Operating side right
 ■ Operating side left
■ not available

Standard functions

- » Integrated position sensors
- » Adjustable stroke limiter
- » Flow control valve for fine adjustment
- » Compressed air monitoring
- » Vacuum monitoring


Options

- » Servo-drive for E-stroke
- » External signal telescope-home position
- » Scanner for barcode validation
- » Product sensor


Machine compatibility

Series 100	Series 300	Series 400	Series 500+	Series 800	Series 900
✓	-	✓	✓	-	✓
R/L	R/L	R/L	R/L	R/L	R

Application

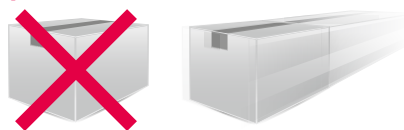

Cycle rate with standard stroke

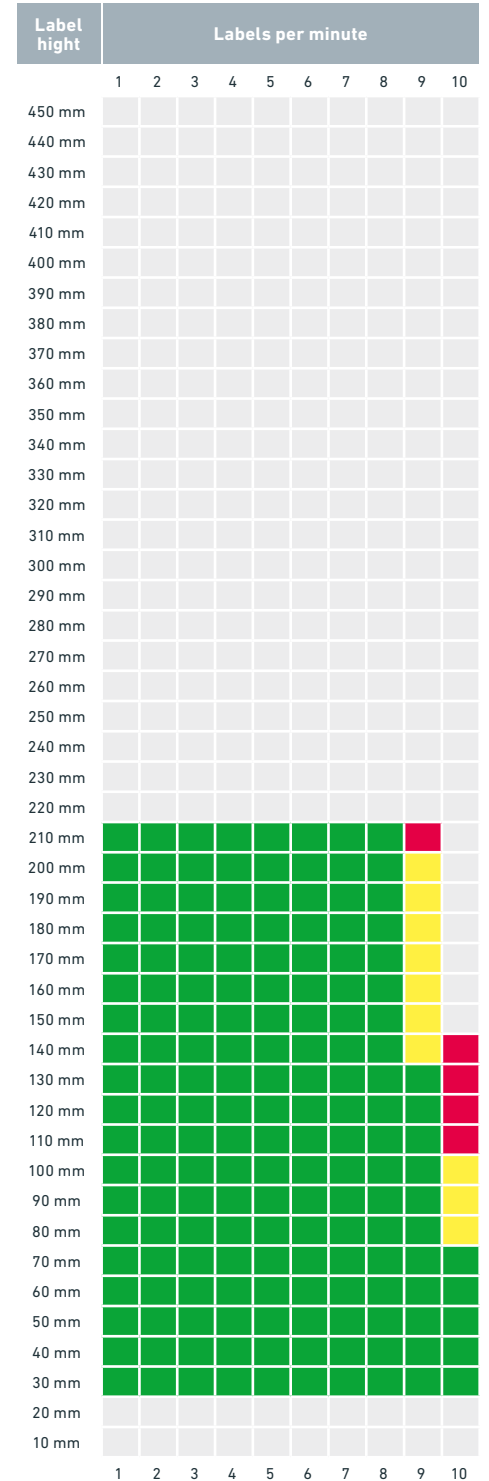

■ Standard
 ■ Advance
 ■ High speed