



Logomatic P2-Applicator

Worldwide standard according to GS1

/ 2-side pallet labelling

/ One-stop labelling solution

Industrial Print & Apply /// logopak.com



Logomatic P2-Applicator

Telescope applicator for 2-side pallet labelling. For front- and side labelling (0° and 90°) according to GS1 with one stop only.

Label format

- / Min.: 100 x 150 mm (WxH)
- / Max.: 150 x 210 mm (WxH)
- / Other formats upon request!

Applicator

- / Labelling of stopped products
- / Realtime labelling: no printed labels in between
- / Up to 180 labels/h
- / Suitable for tertiary- and pallet labelling

Net stroke (P)

- / Standard: 400 mm
- / Min.: 300 mm
- / Max.: 700 mm


Standard functions

- / Integrated position sensors
- / Adjustable stroke limiter
- / Flow control valve for fine adjustment
- / External signal telescope-home position
- / Compressed air monitoring
- / Vacuum monitoring


Options

- / Flexo-pad
- / 4x additional pressing stroke integrated in vacuum pad
- / Vericoder for verification according ISO-norm
- / Scanner for barcode validation
- / Product sensor

Cycle rate with standard stroke

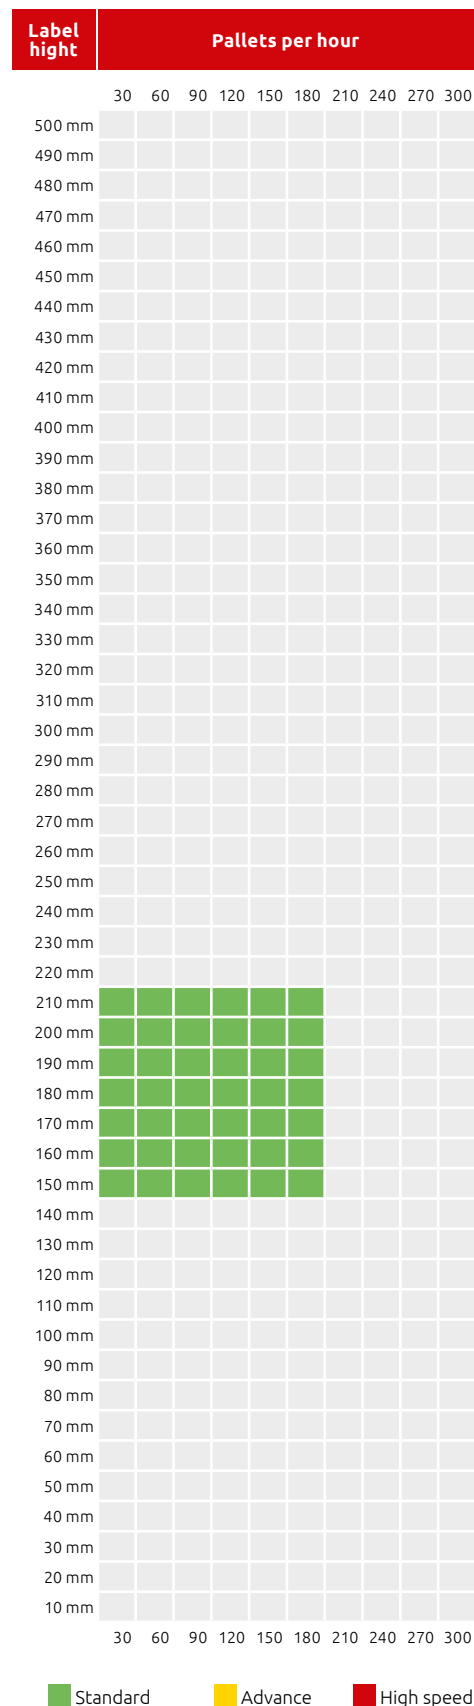

Orientation

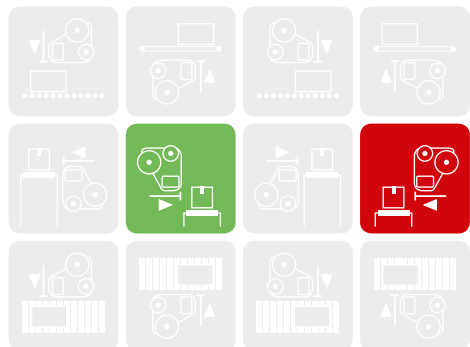


- Green square: Operating side right
- Red square: Operating side left
- Grey square: not available

Machine compatibility

Series 100	Series 300	Series 400	Series 500	Series 800	Series 900
-	-	-	-	✓	✓
R/L	R/L	R	R/L	R/L	R

Application

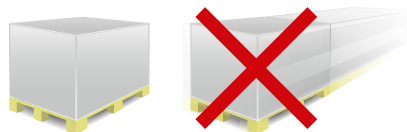

- Green square: Standard
- Yellow square: Advance
- Red square: High speed

Subject to technical changes..