



Logomatic TBH-Applicator

Mail-order labelling

/ Suitable for harsh environments

/ Suitable for varying product dimensions

Industrial Print & Apply /// logopak.com



Logomatic TBH-Applicator

Telescope applicator for high-speed labelling of products with variable product heights. Blow-on function, servo drive with servo controller and integrated height measure system.

Label format

- / Min.: 50 x 50 mm (WxH)
- / Max.: 210 x 155 mm (WxH)
- / Other formats upon request!

Applicator

- / Labelling with stopped or moving products possible
- / Realtime labelling: no printed labels in between
- / Up to 50 labels/min
- / Suitable for primary- and secondary labelling

Net stroke (TBH)

- / Standard: 350 mm
- / Min.: 100 mm
- / Max.: 700 mm

Standard functions

- / Integrated position sensors
- / Compressed air monitoring
- / Vacuum monitoring


Options

- / External signal telescope-home position
- / Height measure system
- / Vericoder for verification according ISO-norm
- / Scanner for barcode validation
- / Product sensor

Cycle rate with standard stroke



Orientation

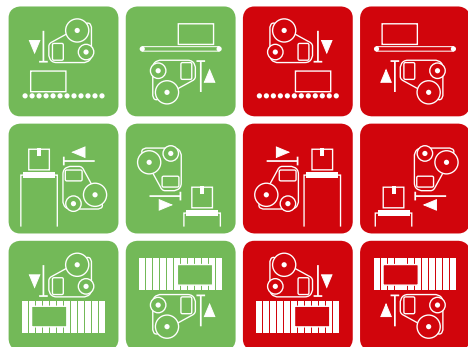

■ Operating side right ■ Operating side left
■ not available

Machine compatibility

	Series 100	Series 300	Series 400	Series 500	Series 800	Series 900
	-	-	✓	✓	-	✓
	R/L	R/L	R/L	R/L	R/L	R

Application



Subject to technical changes..