

Technical specifications

LOGOMATIC Applicator | F

Front- / rear labelling of moving products

- » Product gap control
- » Blow-on function

LOGOMATIC Applicator | F

Applicator with swing arm for front- or rear-side labelling while products are moving.

Label format

- » Min.: 35 × 30 mm (W × H)
- » Max.: 165 × 155 mm (W × H)
- » Other formats upon request!

Applicator

- » Labelling of moving products
- » Realtime labelling: no printed labels in between
- » Up to 50 labels / min
- » Suitable for primary- and secondary labelling

Net stroke (F)

- » Standard: 250 mm
- » Min.: 100 mm
- » Max.: 400 mm

Net stroke (F) Series 300

- » Standard: 300 mm

Standard functions

- » Integrated position sensors
- » Flow control valve for fine adjustment
- » Compressed air monitoring
- » Vacuum monitoring


Options

- » Vericoder for verification according ISO-norm
- » Scanner for barcode validation
- » Product sensor

Cycle rate with standard stroke



Orientation

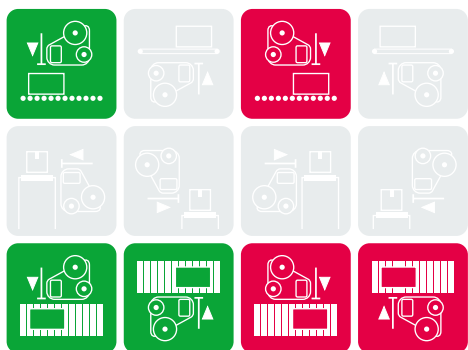


■ Operating side right
 ■ Operating side left
 ■ not available

Machine compatibility

Series 100	Series 300	Series 400	Series 500	Series 800	Series 900
-	-	-	-	✓	✓
R/L	R/L	R/L	R/L	R/L	R

Application

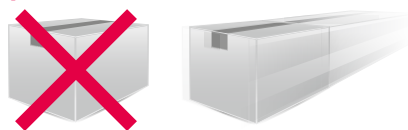

■ Standard
 ■ Advance
 ■ High speed