

Technical specifications

LOGOMATIC Applicator | TB

All-rounder for product labelling

- » Extreme robust design
- » Integrated blow-on function

LOGOMATIC Applicator | TB

Telescope applicator and vacuum-pad for variable product heights with blow-on function with adjustable stroke length limiter.

Label format

- » Min.: 35 × 30 mm (W × H)
- » Max.: 165 × 155 mm (W × H)
- » Other formats upon request!

Applicator

- » Labelling in moving condition or while product is stopped
- » Realtime labelling: no printed labels in between
- » Up to 30 labels / min
- » Suitable for primary- and secondary labelling

Net stroke (TB)

- » Standard: 350 mm
- » Min.: 50 mm
- » Max. (except Series 300): 500 mm

Net stroke (TB) Series 300

- » Standard: 350 mm
- » Min.: 50 mm
- » Max.: 350 mm


Standard functions

- » Integrated position sensors
- » Adjustable stroke limiter
- » Flow control valve for fine adjustment
- » Compressed air monitoring
- » Vacuum monitoring

Options

- » Flexo-pad
- » External signal telescope-home position
- » Vericoder for verification according ISO-norm
- » Scanner for barcode validation
- » Product sensor
- » Passive sponge roller

Orientation

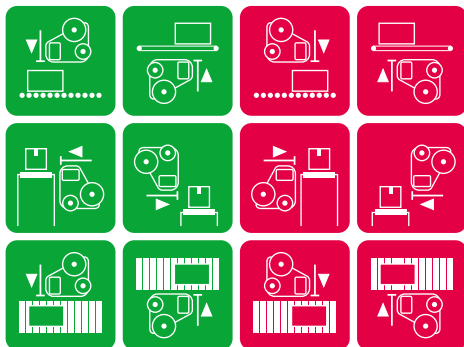

■ Operating side right
 ■ Operating side left
 not available

Machine compatibility

Series 100	Series 300	Series 400	Series 500	Series 800	Series 900
✓	✓	✓	✓	-	✓
R/L	R/L	R/L	R/L	R/L	R

Application



Cycle rate with standard stroke



■ Standard
 ■ Advance
 ■ High speed