

# Logomatic P3-Applicator

Worldwide standard according to GS1+

- / 3-side pallet labelling
- / Two-stop labelling solution

Industrial Print & Apply /// [logopak.com](http://logopak.com)



# Logomatic P3-Applicator

Telescope applicator for 3-side pallet labelling. For front-, side- and rear labelling (0°, +90° and -90°) according to GS1+ with two stops only.

## Label format

- / Min.: 100 x 150 mm (WxH)
- / Max.: 150 x 210 mm (WxH)
- / Other formats upon request!

## Applicator

- / Labelling of stopped products
- / Realtime labelling: no printed labels in between
- / Up to 120 labels/h
- / Suitable for tertiary- and pallet labelling

## Net stroke (P)

- / Standard: 400 mm
- / Min.: 300 mm
- / Max.: 700 mm


## Standard functions

- / Integrated position sensors
- / Adjustable stroke limiter
- / Flow control valve for fine adjustment
- / External signal telescope-home position
- / Compressed air monitoring
- / Vacuum monitoring


## Options

- / Flexo-pad
- / 4x additional pressing stroke integrated in vacuum pad
- / Vericoder for verification according ISO-norm
- / Scanner for barcode validation
- / Product sensor

## Cycle rate with standard stroke

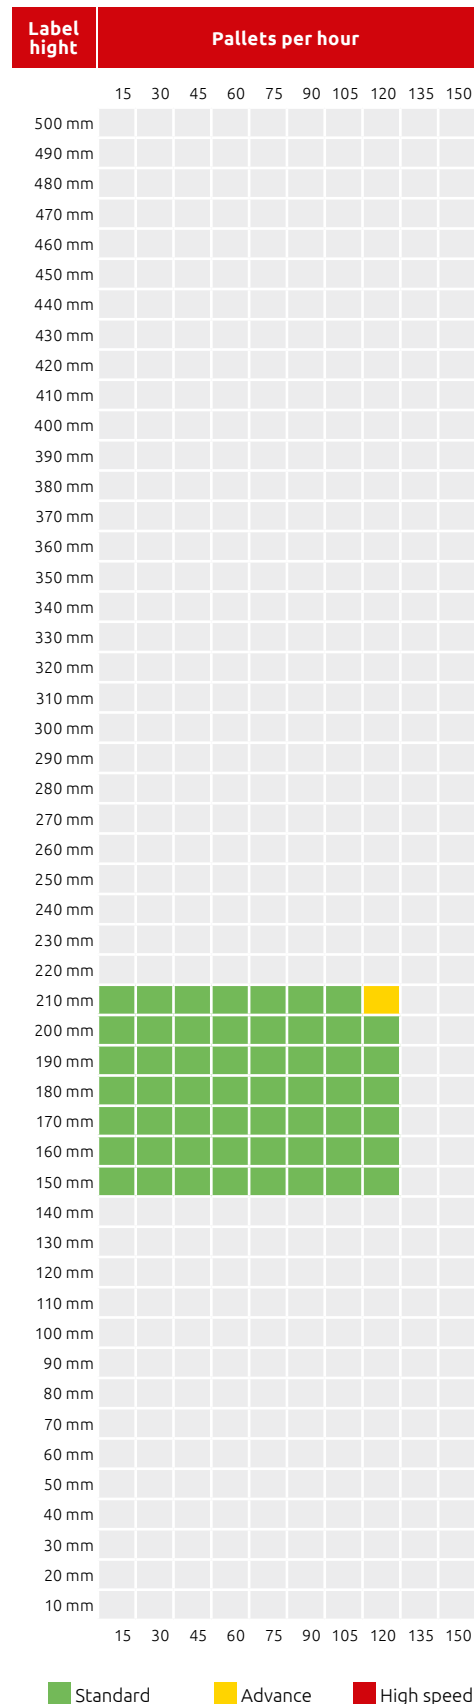

## Orientation

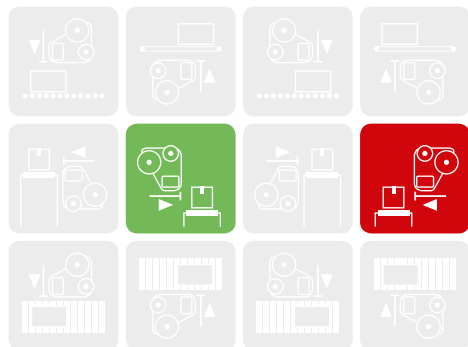


- Operating side right
- Operating side left
- not available

## Machine compatibility

Series 100	Series 300	Series 400	Series 500	Series 800	Series 900
-	-	-	-	✓	✓
R/L	R/L	R	R/L	R/L	R

## Application

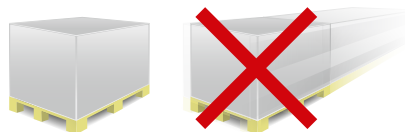

Subject to technical changes..