



# Logomatic TB HighSpeed-Applicator

For high speed real-time labelling

- / Extreme robust design
- / Integrated blow-on function

Industrial Print & Apply /// [logopak.com](http://logopak.com)



# Logomatic TB HighSpeed-Applicator

Short stroke applicator with vacuum-pad and blow-on function.

## Label format

- / Min.: 35 x 30 mm (W x H)
- / Max.: 165 x 105 mm (W x H)
- / Other formats upon request!

## Applicator

- / Labelling in moving condition or while product is stopped
- / Realtime labelling: no printed labels in between
- / Up to 80 labels/min
- / Suitable for primary- and secondary labelling

## Net stroke (TB-HS)

- / Standard: 15 mm
- / Min.: 5 mm
- / Max. (except Series 300): 90 mm

## Net stroke (TB-HS) Series 300

- / Standard: 30 mm


## Standard functions

- / Integrated position sensors
- / Flow control valve for fine adjustment
- / Compressed air monitoring
- / Vacuum monitoring


## Options

- / Vericoder for verification according ISO-norm
- / Scanner for barcode validation
- / Product sensor
- / Passive sponge roller

## Cycle rate with standard stroke

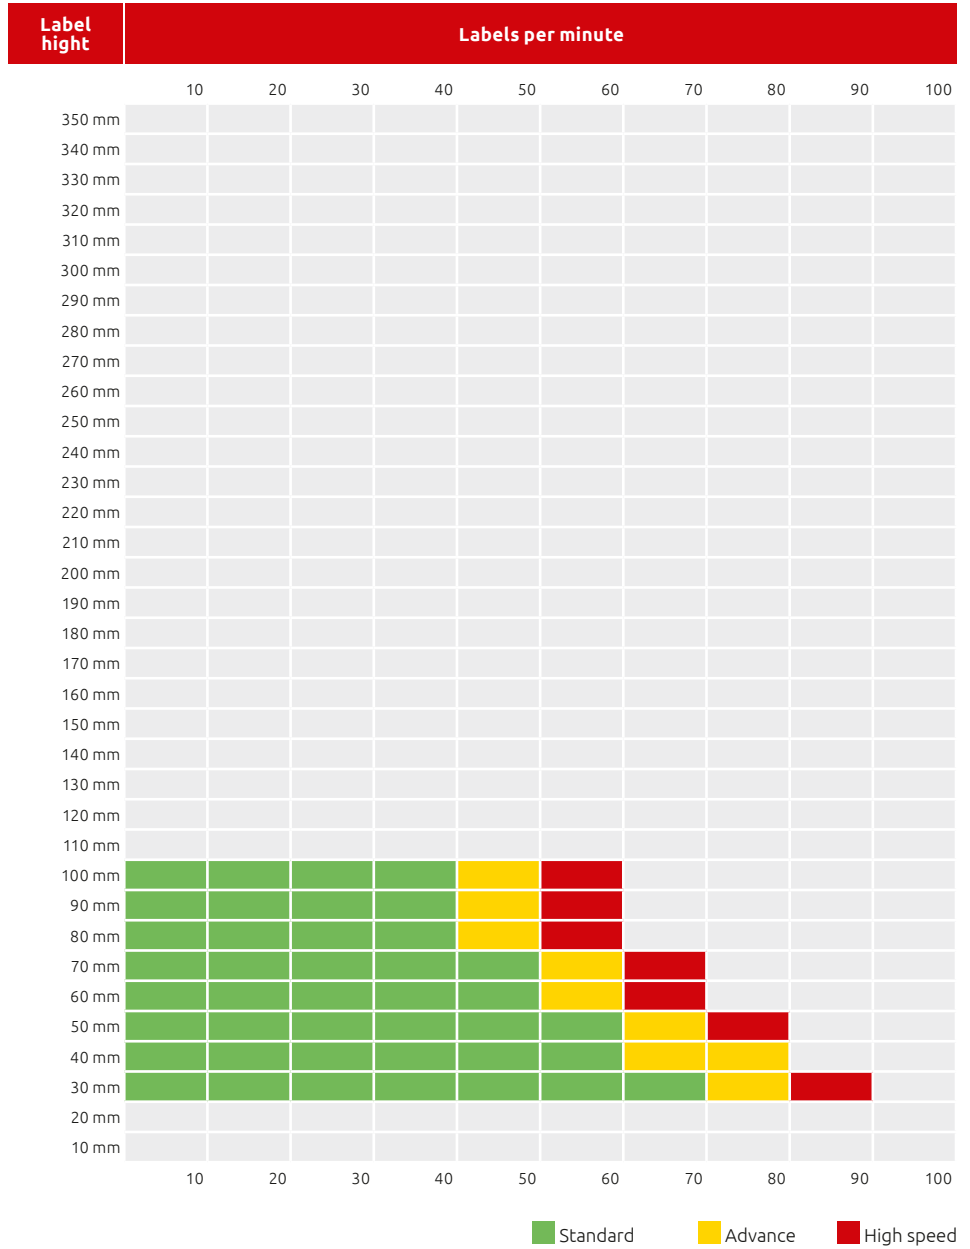

## Orientation

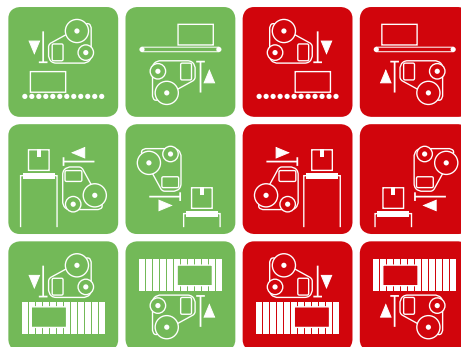


■ Operating side right    ■ Operating side left  
   not available

## Machine compatibility

Series 100	Series 300	Series 400	Series 500	Series 800	Series 900
✓	✓	✓	✓	-	✓
R/L	R/L	R/L	R/L	R/L	R

## Application

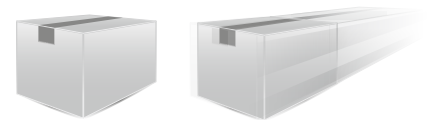

Subject to technical changes..