



Technical specifications

LOGOMATIC Applicator | TE

All-rounder for round the corner application

- » Extreme robust design
- » Suitable for harsh environments

LOGOMATIC Applicator | TE

Telescope applicator to apply labels round the corner in static product condition. The labeller can be positioned above or aside the conveyor system.

Label format

- » Min.: 74 × 30 mm (W × H)
- » Max.: 210 × 300 mm (W × H)
- » Other formats upon request!

Applicator

- » Labelling of stopped products
- » Realtime labelling: no printed labels in between
- » Up to 18 labels / min
- » Suitable for primary- and secondary labelling

Net stroke (T)

- » Standard: 350 mm
- » Min.: 50 mm
- » Max.: 500 mm

Net stroke (E)

- » Standard: 150 mm
- » Min.: 25 mm
- » Max.: 200 mm


Standard functions

- » Integrated position sensors
- » Adjustable stroke limiter
- » Flow control valve for fine adjustment
- » Compressed air monitoring
- » Vacuum monitoring


Options

- » External signal telescope-home position
- » Vericoder for verification according ISO-norm
- » Scanner for barcode validation
- » Product sensor

Cycle rate with standard stroke

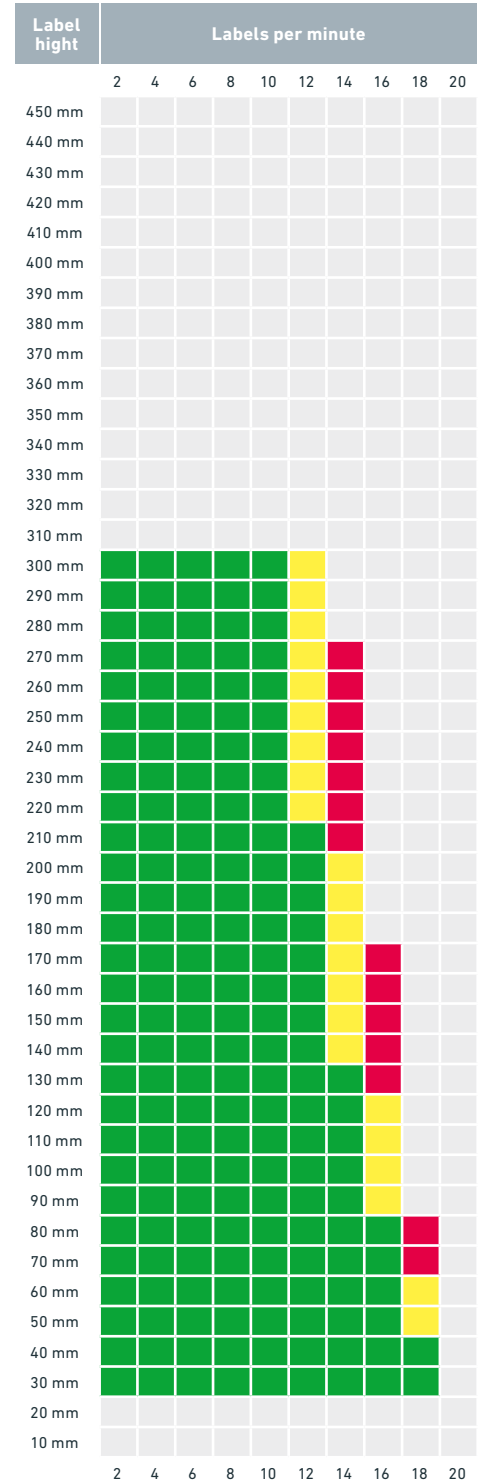

Orientation

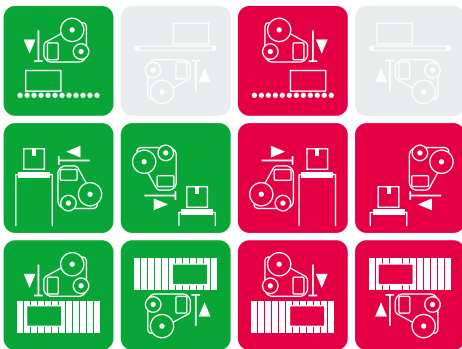


■ Operating side right
 ■ Operating side left
■ not available

Machine compatibility

| Series 100 | Series 300 | Series 400 | Series 500 | Series 800 | Series 900 |
|------------|------------|------------|------------|------------|------------|
| ✓ | - | ✓ | ✓ | - | ✓ |
| R/L | R/L | R/L | R/L | R/L | R |

Application

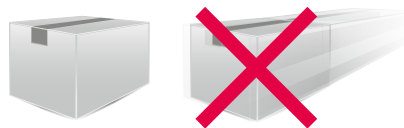

■ Standard
 ■ Advance
 ■ High speed