

# Logomatic PFR-DK-Applicator

Worldwide standard according to GS1

- / Very high cycle rates
- / Suitable for harsh environments

Industrial Print & Apply /// [logopak.com](http://logopak.com)



# Logomatic PFR-DK-Applicator

Double-telescope applicator for pallet labelling onto 3-sides (0°, +90° and -90° – labelling front-, side- and rear side). Including enclosure and frame.

## Label format

- / Min.: 100 x 150 mm (WxH)
- / Max.: 150 x 210 mm (WxH)
- / Other formats upon request!

## Applicator

- / Labelling of stopped products
- / Realtime labelling: no printed labels in between
- / Up to 240 pallets/h
- / Suitable for tertiary- and pallet labelling

## Net stroke (P)

- / Standard: 400 mm
- / Min.: 300 mm
- / Max.: 500 mm

## Net stroke (F/R)

- / Standard: 200 mm


## Standard functions

- / Integrated position sensors
- / Adjustable stroke limiter
- / Flow control valve for fine adjustment
- / External signal telescope-home position
- / Compressed air monitoring
- / Vacuum monitoring

## Options

- / Stainless steel and special colours
- / Adjustable cooling- or heating systems
- / Flexo-pad
- / 1x additional pressing stroke integrated in vacuum pad
- / 4x additional pressing stroke integrated in vacuum pad
- / Brake-cylinder for positioning
- / Vericoder for verification according ISO-norm (series 800)
- / Scanner for barcode validation
- / Product sensor

## Cycle rate with standard stroke

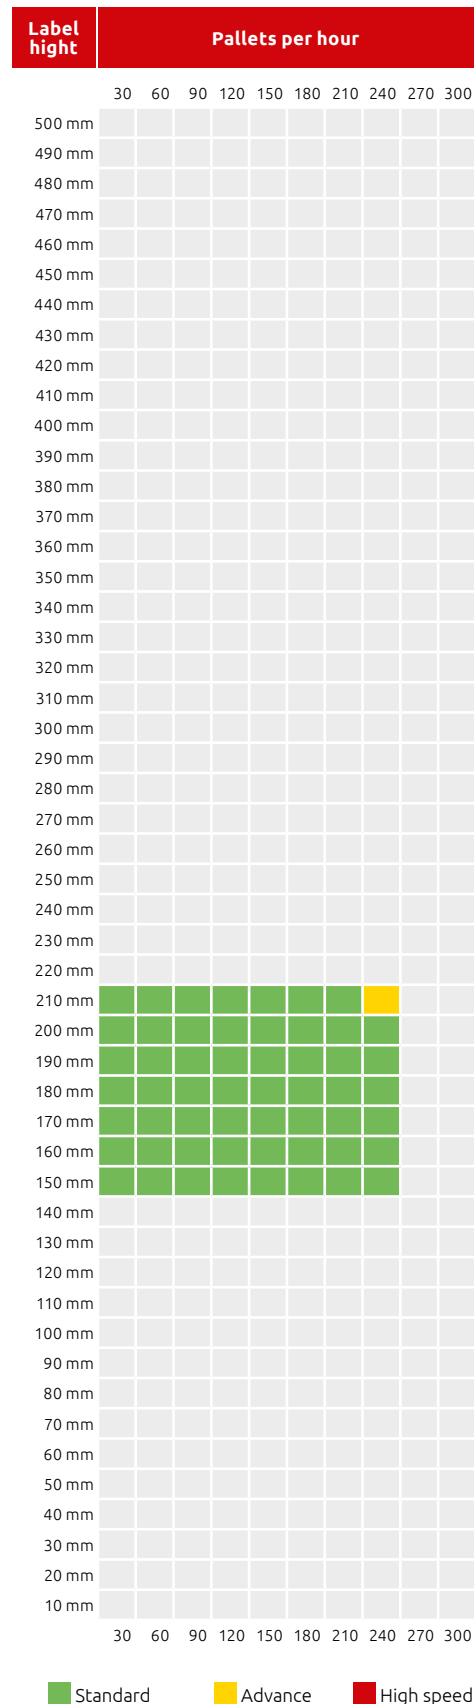

## Orientation




■ Operating side right   
 ■ Operating side left  
■ not available

## Machine compatibility

Series 100	Series 300	Series 400	Series 500	Series 800	Series 900
-	-	-	-	✓	✓
R/L	R/L	R	R/L	R/L	R

## Application

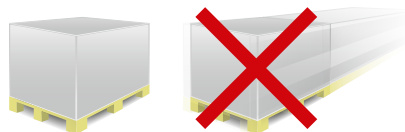

Subject to technical changes..