

Technical specifications

LOGOMATIC Applicator | P

All-rounder for pallet labelling

- » Extreme robust design
- » Integrated blow-on function

LOGOMATIC Applicator | P

Telescope applicator for pallet labelling.

Label format

- » Min.: 74 × 74 mm (W × H)
- » Max.: 300 × 420 mm (W × H)
- » Other formats upon request!

Applicator

- » Labelling of stopped products
- » Realtime labelling: no printed labels in between
- » Up to 240 pallets/h
- » Suitable for tertiary- and pallet labelling

Net stroke (P) Series 800

- » Standard: 500 mm
- » Min.: 300 mm
- » Max.: 500 mm

Net stroke (P) Series 900

- » Standard: 800 mm
- » Min.: 300 mm
- » Max.: 1.000 mm


Standard functions

- » Integrated position sensors
- » Adjustable stroke limiter
- » Flow control valve for fine adjustment
- » External signal telescope-home position
- » Compressed air monitoring
- » Vacuum monitoring


Options

- » Flexo-pad
- » 1x additional pressing stroke integrated in vacuum pad
- » 4x additional pressing stroke integrated in vacuum pad
- » Brake-cylinder for positioning
- » Vericoder for verification according ISO-norm
- » Scanner for barcode validation
- » Product sensor

Cycle rate with standard stroke

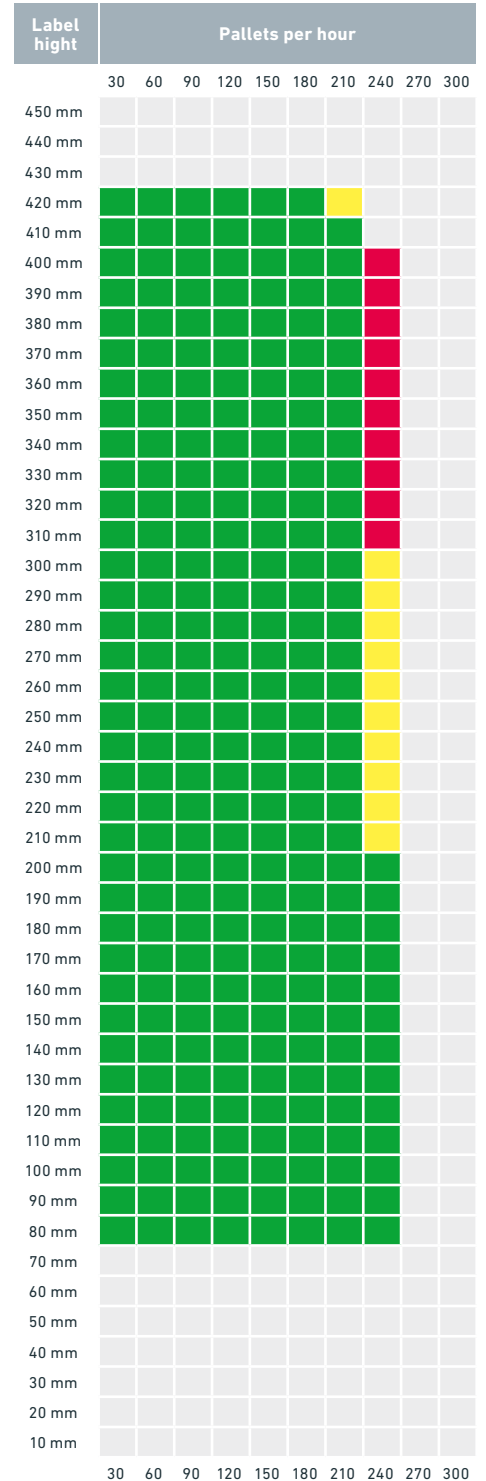

Orientation

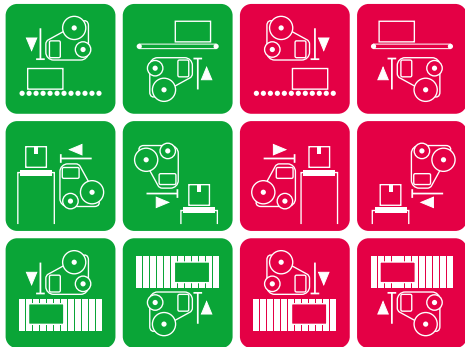


■ Operating side right
 ■ Operating side left
■ not available

Machine compatibility

Series 100	Series 300	Series 400	Series 500	Series 800	Series 900
-	-	-	-	✓	✓
R/L	R/L	R	R/L	R/L	R

Application

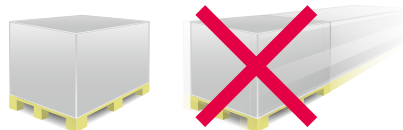

■ Standard
 ■ Advance
 ■ High speed