



Technical specifications

LOGOMATIC Applicator | R

The fast one

- » Rotation-applicator
- » Blow-on unit for non-contact application

LOGOMATIC Applicator | R

Rotation applicator for fast production lines with moving product condition. Blow-on labelling with no contact of product.

Label format

- » Min.: 35 × 35 mm (W × H)
- » Max.: 100 × 50 mm (W × H)
- » Other formats upon request!

Applicator

- » Labelling in moving condition or while product is stopped
- » Realtime labelling: no printed labels in between
- » Up to 150 labels / min
- » Suitable for primary- and secondary labelling

Standard functions

- » Integrated position sensors
- » Flow control valve for fine adjustment
- » Compressed air monitoring
- » Vacuum monitoring


Options

- » Scanner for barcode validation
- » Product sensor
- » Passive sponge roller

Cycle rate with standard stroke

Label height	Labels per minute											
	15	30	45	60	75	90	105	120	135	150		
450 mm												
440 mm												
430 mm												
420 mm												
410 mm												
400 mm												
390 mm												
380 mm												
370 mm												
360 mm												
350 mm												
340 mm												
330 mm												
320 mm												
310 mm												
300 mm												
290 mm												
280 mm												
270 mm												
260 mm												
250 mm												
240 mm												
230 mm												
220 mm												
210 mm												
200 mm												
190 mm												
180 mm												
170 mm												
160 mm												
150 mm												
140 mm												
130 mm												
120 mm												
110 mm												
100 mm												
90 mm												
80 mm												
70 mm												
60 mm												
50 mm												
40 mm												
30 mm												
20 mm												
10 mm												

Orientation

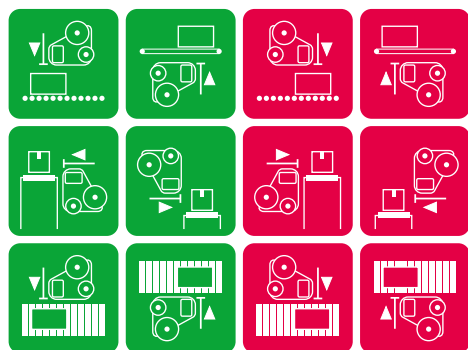

■ Operating side right
 ■ Operating side left
 ■ not available

Machine compatibility

Series 100	Series 300	Series 400	Series 500	Series 800	Series 900
–	–	✓	✓	–	✓
R / L	R / L	R / L	R / L	R / L	R

Application



■ Standard
 ■ Advance
 ■ High speed