



Logomatic ETVM90-Applicator

With two apply positions

- / Suitable for round surfaces or bags
- / Fit various products dimensions

Industrial Print & Apply /// logopak.com



Logomatic ETVM90-Applicator

Telescope applicator with 2-axes and pneumatic pivot mechanism to apply labels onto uneven or round surfaces in moving product condition. The swing direction is rotated 90° of the print direction.

Label format

- / Min.: 65 x 30 mm (WxH)
- / Max.: 210 x 210 mm (WxH)
- / Other formats upon request!

Applicator

- / Labelling of moving products
- / Realtime labelling: no printed labels in between
- / Up to 10 labels/min
- / Suitable for primary- and secondary labelling

Net stroke (E)

- / Standard: 250 mm
- / Min.: 25 mm
- / Max.: 500 mm


Net stroke (T)

- / Standard: 350 mm
- / Min.: 50 mm
- / Max.: 500 mm

Net stroke (V90)

- / Standard: 30 mm
- / Min.: 10 mm
- / Max.: 45 mm

Orientation

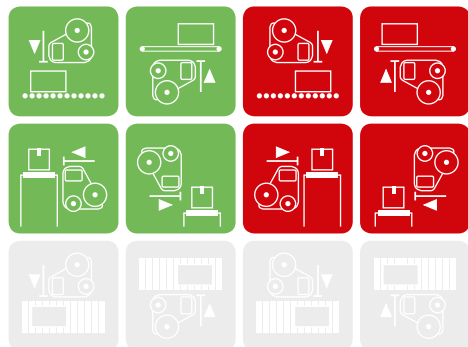

■ Operating side right ■ Operating side left
■ not available

Standard functions

- / Integrated position sensors
- / Adjustable stroke limiter
- / Flow control valve for fine adjustment
- / Compressed air monitoring
- / Vacuum monitoring


Options

- / Servo-drive for E-stroke
- / External signal telescope-home position
- / Scanner for barcode validation
- / Product sensor


Machine compatibility

Series 100	Series 300	Series 400	Series 500	Series 800	Series 900
✓	-	✓	✓	-	✓
R/L	R/L	R/L	R/L	R/L	R

Application

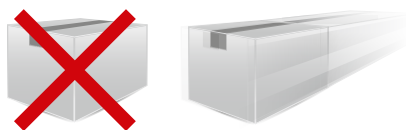

Cycle rate with standard stroke

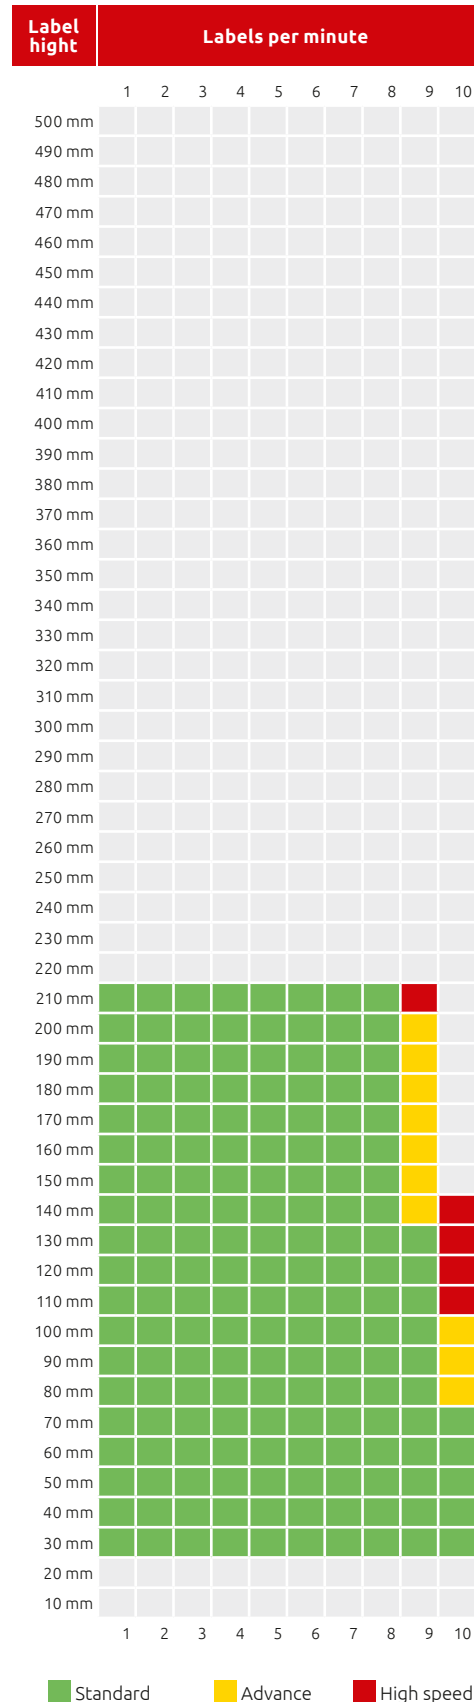

Subject to technical changes..