



Logomatic TE-Applicator

All-rounder for round the corner application

- / Extreme robust design
- / Suitable for harsh environments

Industrial Print & Apply /// logopak.com



Logomatic TE-Applicator

Telescope applicator to apply labels round the corner in static product condition. The labeller can be positioned above or aside the conveyor system.

Label format

- / Min.: 74 x 30 mm (W x H)
- / Max.: 210 x 300 mm (W x H)
- / Other formats upon request!

Applicator

- / Labelling of stopped products
- / Realtime labelling: no printed labels in between
- / Up to 18 labels/min
- / Suitable for primary- and secondary labelling

Net stroke (T)

- / Standard: 350 mm
- / Min.: 50 mm
- / Max.: 500 mm

Net stroke (E)

- / Standard: 150 mm
- / Min.: 25 mm
- / Max.: 200 mm


Standard functions

- / Integrated position sensors
- / Adjustable stroke limiter
- / Flow control valve for fine adjustment
- / Compressed air monitoring
- / Vacuum monitoring


Options

- / External signal telescope-home position
- / Vericoder for verification according ISO-norm
- / Scanner for barcode validation
- / Product sensor

Cycle rate with standard stroke

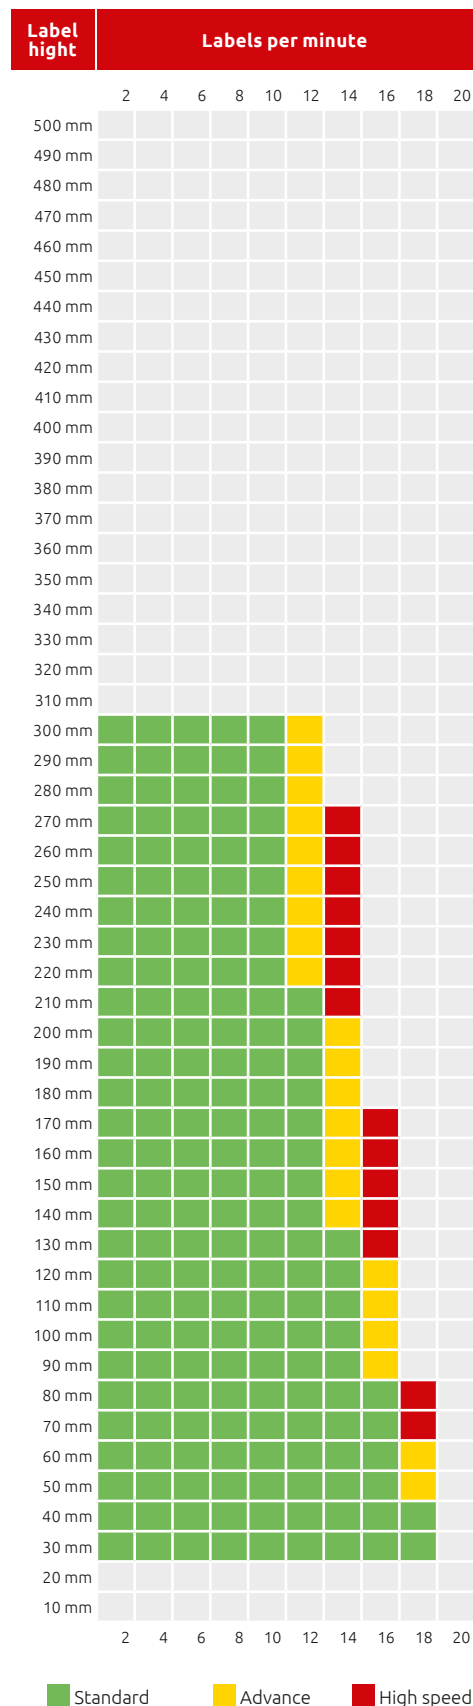

Orientation

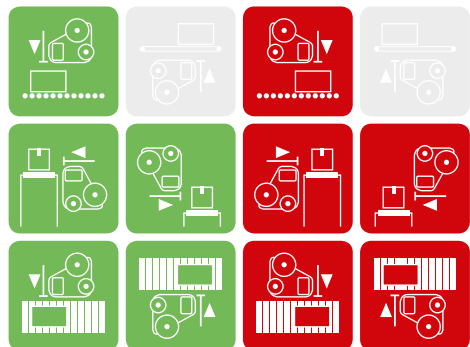


■ Operating side right ■ Operating side left
■ not available

Machine compatibility

Series 100	Series 300	Series 400	Series 500	Series 800	Series 900
✓	-	✓	✓	-	✓
R/L	R/L	R/L	R/L	R/L	R

Application

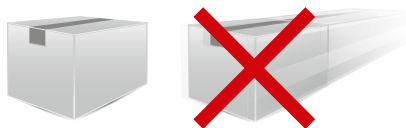

Subject to technical changes..