

# Logomatic TB-Applicator

All-rounder for product labelling

- / Extreme robust design
- / Integrated blow-on function

Industrial Print & Apply /// [logopak.com](http://logopak.com)



# Logomatic TB-Applicator

Telescope applicator and vacuum-pad for variable product heights with blow-on function with adjustable stroke length limiter.

## Label format

- / Min.: 35 x 30 mm (W x H)
- / Max.: 165 x 155 mm (W x H)
- / Other formats upon request!

## Applicator

- / Labelling in moving condition or while product is stopped
- / Realtime labelling: no printed labels in between
- / Up to 30 labels/min
- / Suitable for primary- and secondary labelling

## Net stroke (TB)

- / Standard: 350 mm
- / Min.: 50 mm
- / Max. (except Series 300): 500 mm

## Net stroke (TB) Series 300

- / Standard: 350 mm
- / Min.: 50 mm
- / Max.: 350 mm


## Standard functions

- / Integrated position sensors
- / Adjustable stroke limiter
- / Flow control valve for fine adjustment
- / Compressed air monitoring
- / Vacuum monitoring


## Options

- / Flexo-pad
- / External signal telescope-home position
- / Vericoder for verification according ISO-norm
- / Scanner for barcode validation
- / Product sensor
- / Passive sponge roller

## Cycle rate with standard stroke

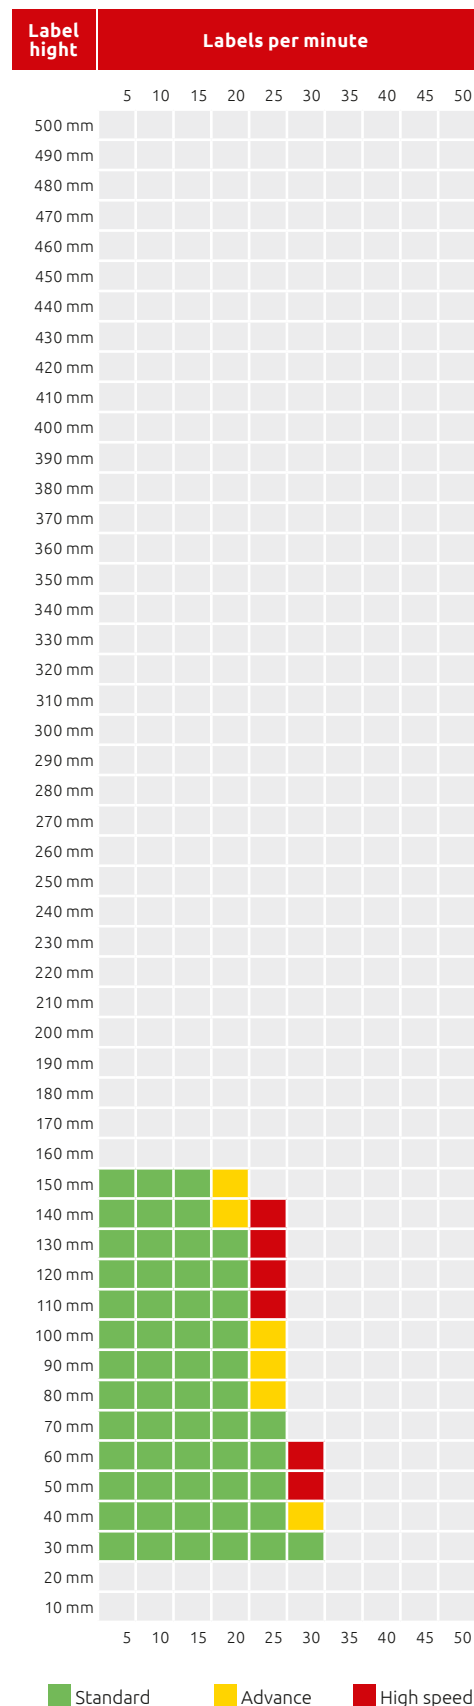

## Orientation

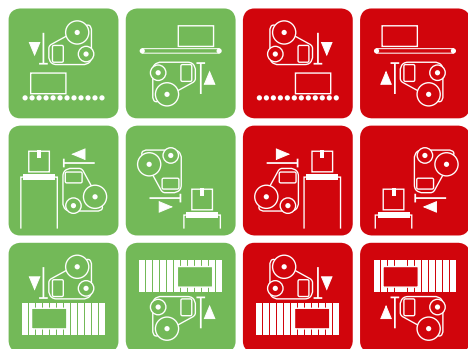

■ Operating side right    ■ Operating side left  
■ not available

## Machine compatibility

Series 100	Series 300	Series 400	Series 500	Series 800	Series 900
✓	✓	✓	✓	-	✓
R/L	R/L	R/L	R/L	R/L	R

## Application



Subject to technical changes..